

Delock Converter M.2 Key B+M male > 2 x SATA 7 pin male with RAID


Description

This converter by Delock expands the system by two SATA ports. When using more than one SATA port, there is the possibility to use different RAID modes.

Note

This product provides a chipset-based RAID function. Management and setting of the RAID mode is not possible via the operating system or BIOS. Different diagnostic software is not compatible with this solution.

The SMART function is not supported. JBOD is only supported on SATA controllers with port multiplier function.

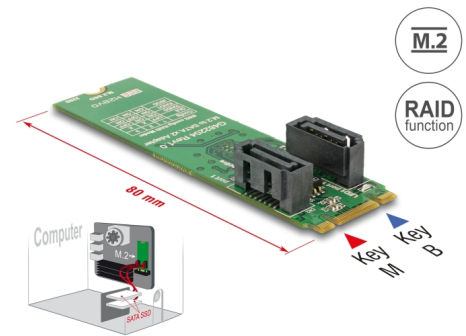

Item no. 62961

EAN: 4043619629619

Country of origin: Taiwan, Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x 59 pin M.2 key B+M male >
 - 2 x SATA 6 Gb/s 7 pin plug
- Chipset: Asmedia ASM1092R
- Interface: SATA
- Form factor: M.2 2280
- Suitable for M.2 slot with key M or B based on SATA
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, JBOD
- Supports HDD and SSD
- 1 x button for RAID setting
- 1 x DIP switch for RAID mode
- Dimensions (LxWxH): ca. 80 x 22 x 11 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64/11, Linux ex Kernel 3.3.0 / Kernel 4.9.4

- One free M.2 key M or key B slot

Package content

- Converter
- User manual

Images



General

Form factor:	M.2 2260 M.2 2280
Supported operating system:	Linux Kernel 3.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit ex Linux Kernel 4.9.4
Slot:	SATA

Interface

Connector 1:	1 x 59 pin M.2 key B+M male
Connector 2:	2 x SATA 6 Gb/s 7 pin plug

Technical characteristics

Chipset:	Asmedia ASM1092R
Data transfer rate:	6 Gb/s
RAID function:	JBOD 0 1

Physical characteristics

Length:	80 mm
Width:	22 mm
Height:	11 mm