


# Delock Converter M.2 Key B+M male to 1 x internal USB 10 Gbps Type-E Key A 20 pin female

## Description

This converter by Delock expands the system by one **USB 3.2 key A 20 pin** female port. Various cables can be connected to the converter, to provide either one USB Type-C™ or one USB Type-A interface.

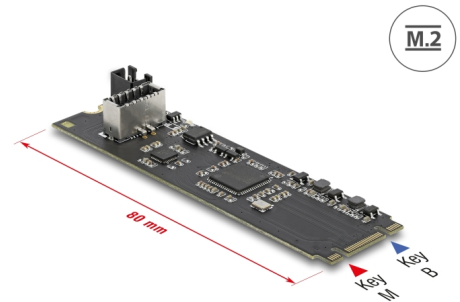

**Item no. 63330**

EAN: 4043619633302

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:
  - 1 x 59 pin M.2 key B+M male >
  - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female
  - 1 x 2 pin power connector
- Chipset: Asmedia ASM3142
- Interface: PCIe
- Form factor: M.2 2280
- Suitable for M.2 slot with key M or B based on PCIe
- Bootable
- Data transfer rate up to 10 Gbps
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Electrical power per port: max. 15 watt (5 V / 3 A)
- LED indicator
- Dimensions (LxWxH): ca. 80 x 22 x 9 mm

## System requirements

- Linux Kernel 3.12 or above
- Windows 8.1/8.1-64/10/10-64
- A free M.2 key M or key B slot

---

## Package content

- Converter
- Power cable 2 pin to SATA, length ca. 30 cm
- Screws
- User manual

---

## Images



## General

|                             |  |
|-----------------------------|--|
| Form factor:                | M.2 2280   |
| Supported operating system: | Linux Kernel 3.12 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit |
| Slot:                       | PCIe   |

## Interface

|              |                                     |
|--------------|-------------------------------------|
| Connector 1: | 1 x 59 pin M.2 key B+M male         |
| Connector 2: | 1 x USB 10 Gbps key A 20 pin female |
| connector 3: | 1 x 2 pin power connector           |

## Technical characteristics

|                     |                 |
|---------------------|-----------------|
| Chipset:            | Asmedia ASM3142 |
| Data transfer rate: | up to 10 Gbps   |