


# Delock SATA 22 pin male to M.2 Key B slot Adapter

## Description

This adapter by Delock enables the connection of an **M.2 SSD** in 2280, 2260, 2242 and 2230 format. The adapter will be installed into the system internally through a SATA 22 pin interface.

### Perfect accessory

This item is suitable as an accessory for the Delock docking and clone station 64098. Thus, M.2 SATA SSDs can be used and cloned.

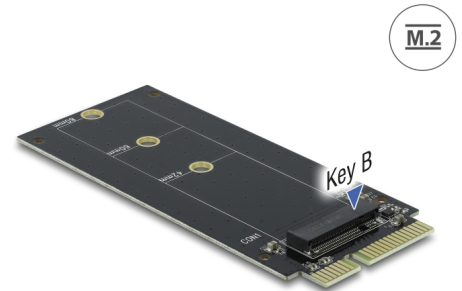

**Item no. 64099**

EAN: 4043619640997

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:
  - 1 x SATA 22 pin plug
  - 1 x 67 pin M.2 key B slot
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable
- 1 x LED indicator
- Data transfer rate up to 6 Gb/s
- Dimensions (LxWxH): ca. 97 x 45 x 4 mm

## System requirements

- A free SATA 22 pin interface


---

## Package content

- Adapter
- Mounting material
- Screwdriver

---

## Images

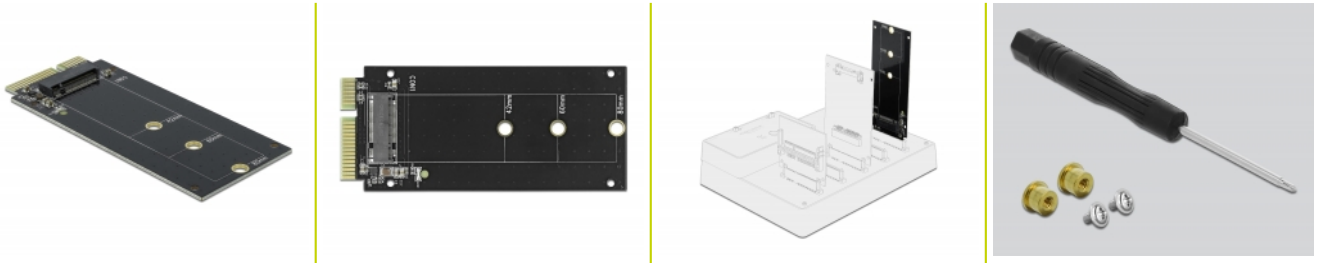

## General

|   |   |
|---|---|
| Function:                                       | bootable  |
| Supported module:                               | M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported                      |

## Interface

|              |                             |
|--------------|-----------------------------|
| Connector 1: | 1 x SATA 6 Gb/s 22 pin plug |
| Connector 2: | 1 x 67 pin M.2 key B slot   |

## Physical characteristics

|         |       |
|---------|-------|
| Length: | 97 mm |
| Width:  | 45 mm |
| Height: | 4 mm  |