


Delock PCI Express x1 to M.2 Key M Adapter

Description

This adapter by Delock enables the connection of an **M.2 SSD in 2280, 2260, 2242 and 2230 format**. The data transmission occurs directly via the PCI Express slot.

Ideal test equipment

Due to the PCIe male connector and the direct installation of the SSD on the board, without enclosure, the Delock adapter is **most suitable as test equipment**.

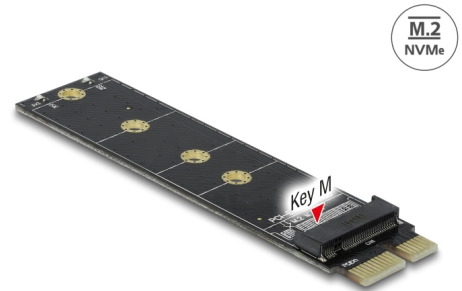

Item no. 64105

EAN: 4043619641055

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x PCI Express x1, V4.0
 - 1 x 67 pin M.2 key M slot
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe (NVMe)
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- 2 x LED indicator for power and activity
- Bootable
- Dimensions (LxWxH): ca. 100 x 24 x 6 mm
- Plug & Play


System requirements

- Linux Kernel 4.6.4 or above
- Windows 8.1/8.1-64/10/10-64/11
- PC with one free PCI Express slot

Package content

- Adapter M.2
- 1 x thermal conductive pad
- M.2 mounting material
- Screwdriver
- User manual

Images

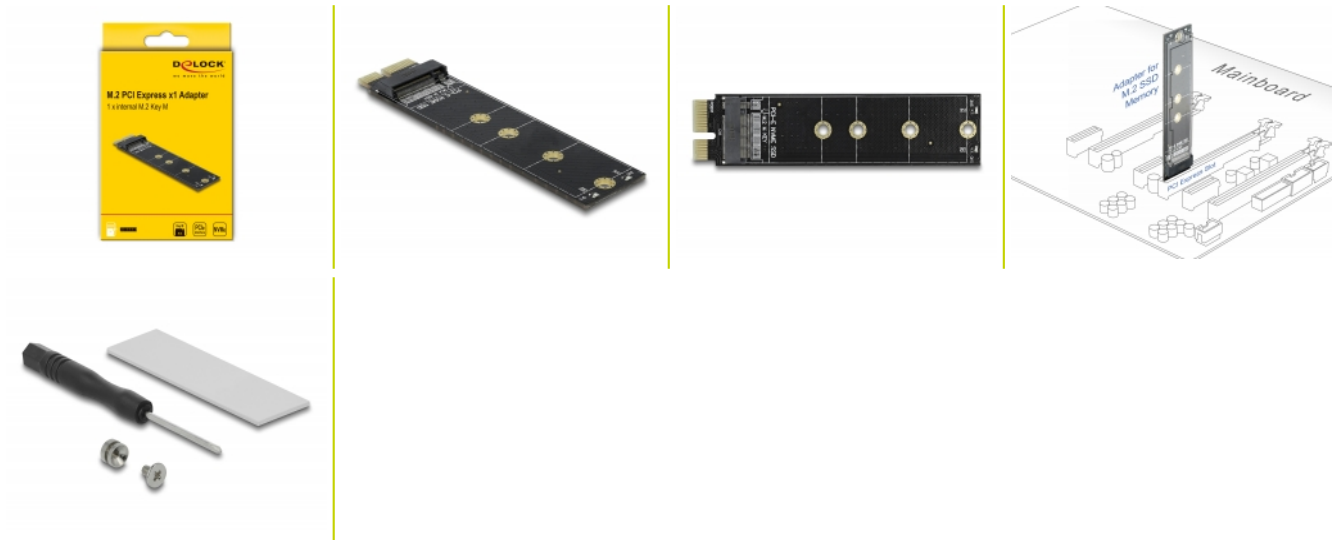

General

Function:	NVM Express (NVMe)
Supported operating system:	Linux Kernel 4.6.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Internal:	1 x 67 pin M.2 key M slot 1 x PCI Express x1, V4.0
-----------	---