

Delock Combo Converter for M.2 NVMe PCIe or SATA SSD with USB 3.2 Gen 2

Description


This converter by Delock enables the installation of an **M.2 PCIe NVMe SSD or SATA M.2 SSD** in **2280, 2260, 2242 and 2230** format, it can be connected via USB to the PC or laptop.

Combo converter

The big advantage of this Delock M.2 converter is that both SATA and PCIe (NVMe) M.2 SSDs can be inserted into the converter. The **memory is automatically recognized by the chipset** and can then be used.

Ideal test equipment

Due to the USB-A connector and the **direct installation of the SSD** on the board, without enclosure, the Delock converter is most suitable as test equipment.

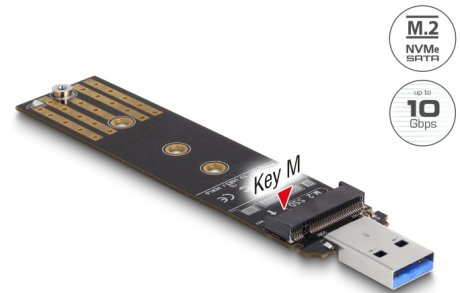

Item no. 64197

EAN: 4043619641970

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A male
 - 1 x 67 pin M.2 key M slot
- Chipset: Realtek RTL9210B
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe (NVMe)
- Supports NVM Express (NVMe)
- Data transfer rate up to 10 Gbps
- LED indicator for power and access
- Bootable
- Dimensions (LxWxH): ca. 110 x 22 x 6 mm
- Plug & Play


System requirements

- Android 11.0 or above
- Chrome OS
- Linux Kernel 5.13 or above
- Mac OS 12.3.1 or above
- Windows 8.1/8.1-64/10/10-64/11
- PC or laptop with a free USB Type-A port

Package content

- M.2 converter
- Mounting material
- Screwdriver
- User manual

Images



General

Function:	NVM Express (NVMe) Plug & Play bootable
Supported operating system:	Chrome OS Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11 Linux Kernel 5.13 or above Mac OS 12.3.1 or above Android 11.0 or above
LED indicator:	power and activity
Slot:	PCIe SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Connector 1:	1 x USB 10 Gbps Type-A male (host)
Connector 2:	1 x 67 pin M.2 key M slot

Technical characteristics

Chipset:	Realtek RTL9210B
Data transfer rate:	10 Gbps