# Delock USB Type-C™ 3 in 1 Retractable Charging Cable for Lightning™ / Micro USB / USB Type-C™ white
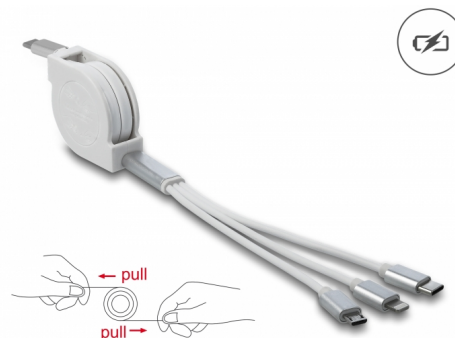
## Description

This practical 3 in 1 retractable cable by Delock can be connected to a power source with USB-C™ connection and can be used to charge various devices with Lightning™, Micro USB or USB Type-C™ interface. Charging three devices at the same time is also supported, whereby the total output current of 2.1 A is then distributed over all lines.

### Useful companion
Due to its small size, the Delock charging cable is a practical companion on the go and always at hand. A knotting of the cables is avoided by its winding mechanism.

### Flexible
The charging cable can be pulled out in four stages and thus offers different cable lengths, depending on requirements.



### Item no. 85844

EAN: 4043619858446
Country of origin: China
Package: Zip poly bag

## Technical details

- 
- Connectors:
    1 x USB 2.0 Type-C™ male >
    1 x 8 pin Apple Lightning™ male
    1 x USB Type Micro-B male
    1 x USB Type-C™ male
- Supports only charging function
- Maximum output current: 2.1 A
- Voltage: max. 5 V
- Cable gauge: 24 AWG
- Flat cable
- Connector with metal housing
- Colour: white / silver
- Length incl. connectors: ca. 98 cm (total incl. housing)

retracted:

USB-C™ Host-cable ca. 2.55 cm

3 Device-cable ca. 15.9 cm

extended:

USB-C™ Host-cable ca. 39.5 cm

3 Device-cable ca. 54.7 cm

## System requirements

• Power source with a free USB Type-C™ port

## Package content

• Cable

## Images

© 2024 by Navilock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.

www.navilock.com
85844

2 / 3
09.08.2023

## Interface

| | |
|---|---|
| connector: | 1 x USB 2.0 Type-C™ male |
| Connector 1: | 1 x Apple Lightning™ 8 pin male<br>1 x USB 2.0 Type Micro-B male<br>1 x USB Type-C™ male |

## Technical characteristics

| | |
|---|---|
| Maximum current: | 3 A |
| Voltage: | 5 V |

## Physical characteristics

| | |
|---|---|
| Cable length incl. connector: | 98 cm |
| Conductor gauge: | 23 AWG |