


Delock PCI Express x4 Card to 1 x external SuperSpeed USB 20 Gbps (USB 3.2 Gen 2x2) USB Type-C™ female - 3 A

Description

This PCI Express card by Delock expands the PC by one external **USB 3.2 port**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

SuperSpeed USB 20 Gbps

The card allows a data transfer rate of **20 Gbps on the USB-C™** port.

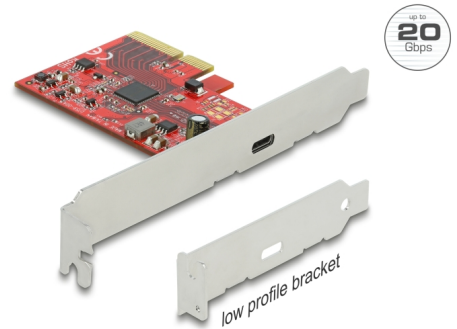

Item no. 89035

EAN: 4043619890354

Country of origin: Taiwan, Republic of China

Package: Retail Box

Technical details

- Connectors:
 - external: 1 x SuperSpeed USB 20 Gbps (USB 3.2 Gen 2x2) USB Type-C™ female
 - internal: 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3242
- Data transfer rate up to:
 - SuperSpeed USB 20 Gbps,
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Electrical power per port: max. 15 watt (5 V / 3 A)
- Bootable
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1

- Supports Multiple INs

System requirements

- Linux Kernel 3.3 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card SuperSpeed USB 20 Gbps
- Low profile bracket
- User manual

Images



General

| | |
|-----------------------------|---|
| Form factor: | Low Profile |
| Function: | bootable |
| Supported operating system: | Linux Kernel 3.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit |

Interface

| | |
|-----------|------------------------------------|
| External: | 1 x USB 20 Gbps USB Type-C™ female |
| Internal: | 1 x PCI Express x4, V3.0 |

Technical characteristics

| | |
|---------------------|-----------------|
| Chipset: | Asmedia ASM3242 |
| Data transfer rate: | 20 Gbps |