


# Delock PCI Express x4 Card to 1 x external USB Type-C™ female + 2 x external USB Type-A female SuperSpeed USB 10 Gbps + 1 x internal USB 5 Gbps Pin Header

## Description

This PCI Express card by Delock expands the PC by **three external USB ports** as well as **one internal pin header**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

### Data transfer rate 5 Gbps internal and 10 Gbps external

The card allows a data transfer rate of **10 Gbps** on the external ports, as well as 5 Gbps on the internal pin header.

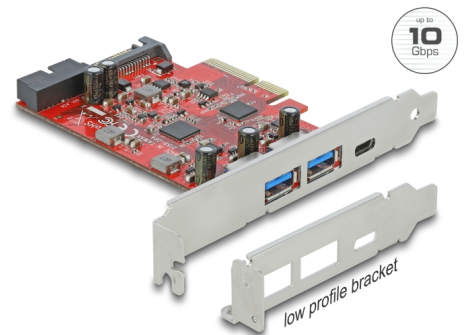

**Item no. 90492**

EAN: 4043619904921

Country of origin: Taiwan, Republic of China

Package: Retail Box

## Technical details

- Connectors:
  - external:
    - 1 x USB 10 Gbps USB Type-C™ female
    - 2 x USB 10 Gbps Type-A female
  - internal:
    - 1 x 19 pin USB 5 Gbps pin header male
    - 1 x SATA 15 pin power connector
    - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142, Genesys Logic GL3590
- Data transfer rate up to 10 Gbps
- Bootable
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Electrical power per port:
  - USB Type-C™: max. 15 watt (5 V / 3 A)

- USB Type-A: max. 10 watt (5 V / 2 A)
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports UASP

---

## System requirements

- Linux Kernel 3.12 or above
- Windows 8.1/8.1-64/10/10-64/11
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

---

## Package content

- PCI Express card SuperSpeed USB 10 Gbps
- Low profile bracket
- User manual

---

## Images



### General

Form factor:	Low Profile
Function:	bootable
Supported operating system:	Linux Kernel 3.12 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

### Interface

External:	2 x USB 10 Gbps Type-A female 1 x USB 10 Gbps USB Type-C™ female
-----------	---

### Technical characteristics

Chipset:	Asmedia ASM3142 Genesys Logic GL3590
Data transfer rate:	10 Gbps

### Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------