


# Delock PCI Express x8 Card to 2 x internal NVMe M.2 Key M 110 mm - Bifurcation - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by two M.2 slots. M.2 SSDs in format 22110, 2280, 2260 and 2242 can be connected. The card requires the **PCIe bifurcation** of the motherboard to split the PCIe signal in order to use multiple slots with M.2 SSDs.

## Note

Without PCIe bifurcation only the first M.2 slot of the card can be used.

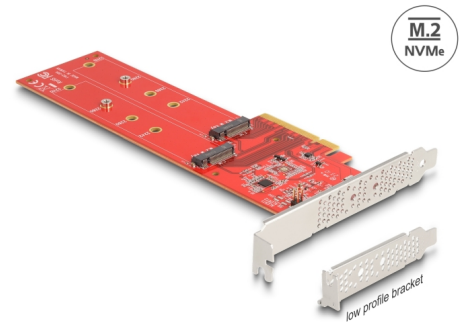

**Item no. 90616**

EAN: 4043619906161

Country of origin: Taiwan, Republic of China

Package: Box

## Technical details

- Connectors:  
internal:  
2 x M.2 key M slot  
1 x PCI Express x8, V4.0  
2 x 2 pin pin header for LED
- Interface: PCIe
- Supports M.2 modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- Supports S.M.A.R.T.
- Supports TRIM

## System requirements

- Linux Kernel 6.2 or above

- Windows 10/10-64/11
- Windows Server 2022
- PC with one free PCI Express x8 / x16 / x32 slot
- Motherboard and BIOS with PCIe bifurcation support




---

## Package content

- PCI Express card
- Low profile bracket
- 2 x screw
- User manual

---

## Images



### General

Form factor:	Low Profile
Function:	Bootable, ex UEFI 2.3.1 TRIM S.M.A.R.T.
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 11 Windows Server 2022 Linux Kernel 6.2 or above
Slot:	PCIe
Supported module:	M.2 modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

### Interface

Internal:	1 x PCI Express x8, V4.0 2 x M.2 key M slot 2 x 2 pin header for LED
-----------	--