


# Delock USB 2.0 IR Camera Module 5.04 mega pixel 48° V5 fix focus

## Description

The Delock USB 2.0 camera module offers in compact construction low power consumption as well as high resolution. It is ideal for installation in industry components like IPCs, embedded systems, sensors, notebooks, smartphones, tablets or instrument manufacture. You can perform with suitable IR lighting shots in the dark. The use of a photosensitive sensor with back side illumination (BSI) expands the scope of this module.

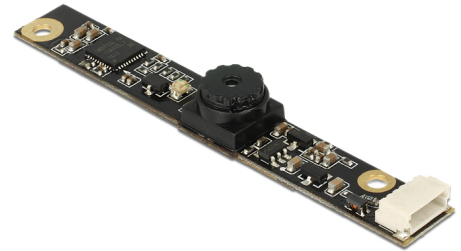

**Item no. 96371**

EAN: 4043619963713

Country of origin: China

Package: Retail Box

## Technical details

- Connector: USB 2.0 5 pin jack SMT, 1 mm pitch
- Resolutiob: 5.04 Mega Pixel
- Without optical IR filter
- Standard SCCB interface (I<sup>2</sup>C Bus)
- Output support for RAW RGB, RGB565/555/444, CCIR656, YUV422/420, YCbCr422 and compression
- Maximum resolution: QSXGA (2592 x 1944)
- Automatic image control functions including
  - Automatic exposure control (AEC)
  - Automatic white balance (AWB)
  - Automatic band filter (ABF)
  - Automatic black-level calibration (ABLC)
- Image quality controls including colour saturation, gamma, sharpness (edge enhancement), lens correction, white pixel canceling, noise canceling, and automatic 50/60 Hz luminance detection
- Supports scaling
- Power consumption:
  - Sensor suspend: 90 mA
  - Sensor active: 140 mA ± 5 mA @ 640 x 480 pixel

- Operating voltage: 5 V DC
- Operating temperature: 5 °C ~ 50 °C
- Relative humidity during operation: max. 80 %
- Sensor size: 1/4 inch
- Sensitivity: 0.6 V (lx s)
- Signal to noise ratio: 36 dB
- Dynamic range: 68 dB
- Fix focus: 0.3 m ~ infinite
- Lens: F/2.8
- Frame rates:
  - 30 fps @ HVGA, VGA, XGA, 720p, QVGA
  - 15 fps @ UXGA, 1080p, QXGA
  - 7 fps @ 2592 x1944
- Dimension (LxWxH): ca. 60 x 8 x 6.3 mm

---

## System requirements

- PC with UVC support
- Windows Vista/ 7/ 8/ 10
- DirectX 9.0c and above
- Linux 2.6.15 and above with Video4Linux
- Minimum CPU P4 1.4 GHz, 512 MB RAM

---

## Package content

- Camera module
- CD ROM with user manual

---

## Images



## General

|                               |   |
|-------------------------------|---|
| Supported operating system:   | Linux Kernel 2.6.15 and above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 7 32-Bit<br>Windows 7 64-Bit<br>Windows 8 32-bit<br>Windows 8 64-bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit<br>Windows Vista 32-bit<br>Windows Vista 64-bit |
| Operating system requirement: | Windows DirectX from 9.0c<br>Linux with Video4Linux   |

## Interface

|            |         |
|------------|---------|
| connector: | USB 2.0 |
|------------|---------|

## Technical characteristics

|                            |                     |
|----------------------------|---------------------|
| Operating voltage:         | 5 V                 |
| Operating temperature:     | 5 °C ~ 50 °C        |
| Maximum screen resolution: | 2592 x 1944 @ 7 fps |
| Minimum screen resolution: | 160 x 144 @ 30 fps  |
| Sensor Size:               | 1/4"                |
| Current consumption:       | 140 mA @ 640 x 480  |

## Physical characteristics

|         |       |
|---------|-------|
| Length: | 60 mm |
| Width:  | 8 mm  |
| Height: | 13 mm |