


Navilock NL-281GG Multi GNSS GALILEO GLONASS GPS SMA Plug Antenna 3 m outdoor

Description

This external Navilock GNSS antenna is equipped for the simultaneous reception of GPS and GLONASS signals.

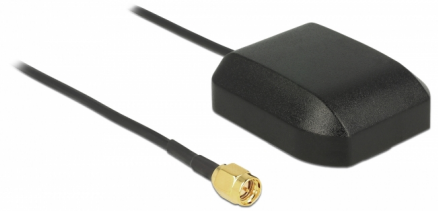

3 m

Item no. 60555

EAN: 4043619605552

Country of origin: China

Package: Zip poly bag

Technical details

- External active additional antenna for GNSS receivers
- Connector: SMA plug
- Polarisation: RHCP
- Frequency range:
 - GPS: 1575,42 MHz +/- 1.023 MHz
 - GLONASS: 1598,0625 MHz ~ 1605,375 MHz
- Bandwidth (C/A):
 - GPS: > 2 MHz
 - GLONASS: > 8 MHz
- Gain: 5 dBic (7cm x 7cm ground plane)
- Internal patchantenna: 25 x 25 x 4 mm
- VSWR: 1.5

LAN

- Gain: 30 dBi
- Cable category: coaxial
- Cable typ: RG-174
- Cable length: 3 m
- Cable colour: black
- Impedance: 50 Ohm
- Voltage: 2.80 ~ 5.00 V
- Current: typ. 13.50 mA @ 3.0 V
- VSWR: 2.0
- Imedanz: 50 Ohm
- Protection class: IP66

- Weight: 0.150 kg
- Dimension (LxWxH): ca. 44.00 x 37.00 x 14.50 mm
- Magnetical bottom

System requirements

- Device with free SMA connector

Package content

- GNSS antenna

Images

